Type A

Coolix II

Wever & Ducré IP67 inground uplighter with clear safety tempered glass and tiltable/rotatable light source

Stainless Steel

Ø 198 **D** 173 ⌀190 50W MR16 GU5.3 17455
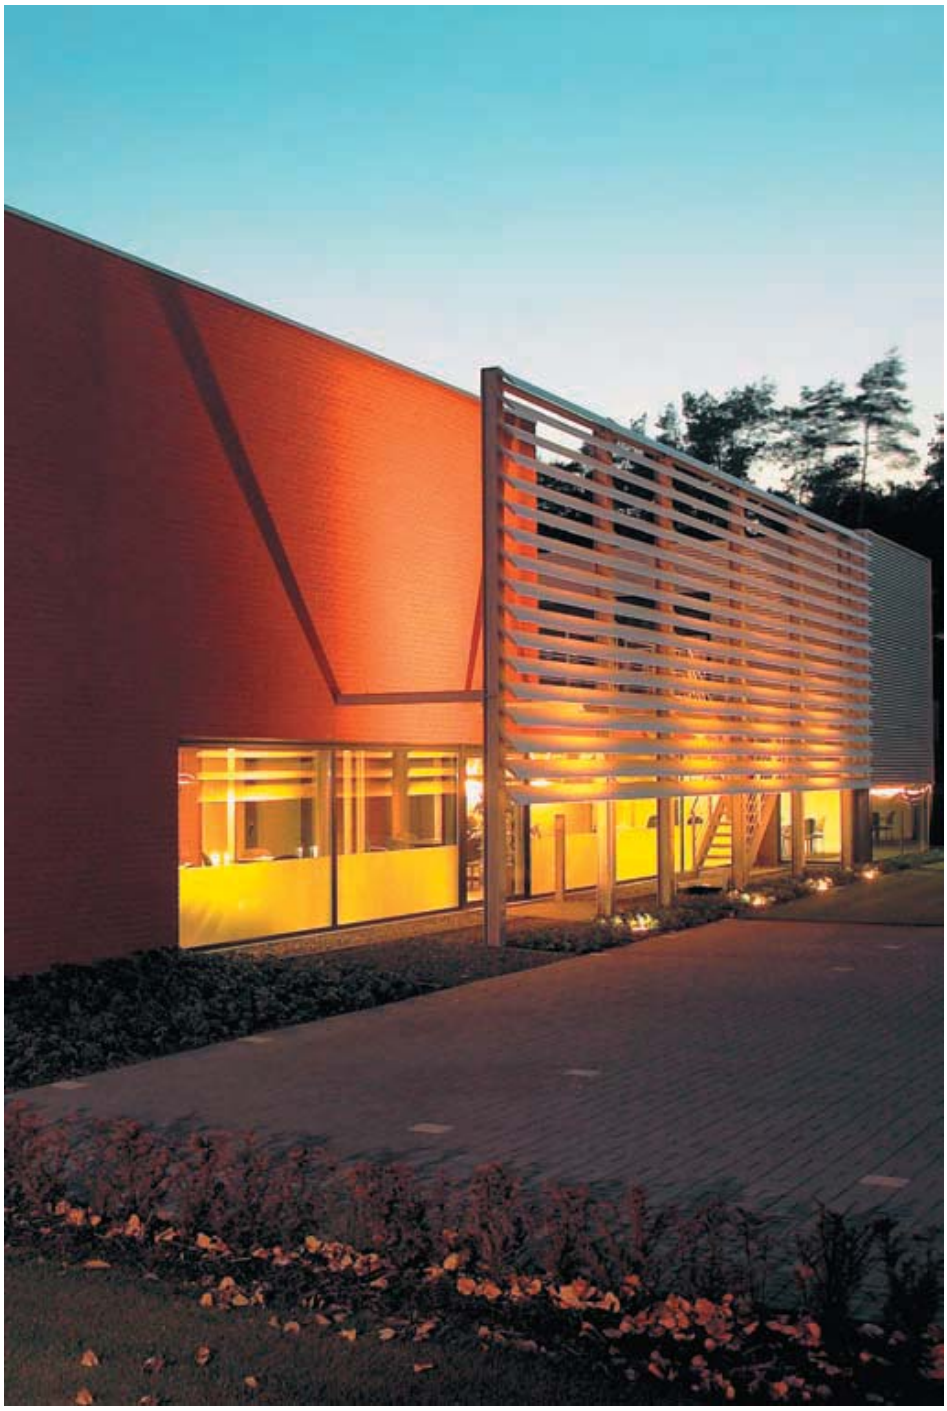
Maximum driveover load 2000 KG at 30 km/h
Glass Temperature at 35W 74°C / at 50W 97°C
See page 180 for technical and installation details